


No.	Changes and/or Note No.	Date	Intr.	No.	Changes and/or Note No.	Date	Intr.

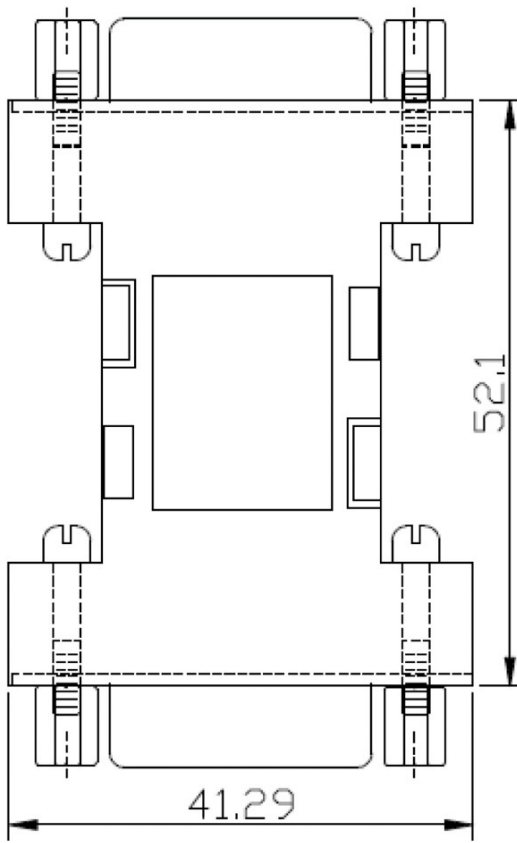


SPECIFICATION

MATERIAL

WIRE :PVC WIRE COMPOUND UL1007
 Insulator: P.B.T & Glass fill reinforced UL94V-0
 Contacts: Brass(standard);Phosphor Bronze(choose)
 Shell: ABS UL94HB
 Rivet,Boardlock: Brass
CONTACT PLATING
 Underplate: 50m" Nicke
 Contact area: 1m" Selective Gold
ELECTRICAL CHARACTERISTICS
 Operation voltage: 250 VAC max.
 Current rating: 3 Amps max.
 Contact resistance: 15 mohms max.
 Insulation resistance: 3000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +105°C

WIRE SPECIFICATION COUNT		
BLACK	F-F	2
BROWN	F-F	2
RED	F-F	2
ORANGE	F-F	2
YELLOW	F-F	2
GREEN	F-F	1
BLUE	F-F	1
VIOLET	F-F	1
GRAY	F-F	1
WHITE	F-F	1

PARTS OPTION

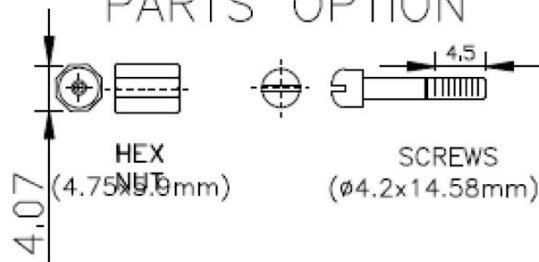

DATE	DRAWN	SCALE	MATERIAL TYPE	
	APPROVED		REPLACES	
			15-way Female to 15-way Female GA-1515-FF-LG-K	
			DRAWING No 2111-0101-22	

