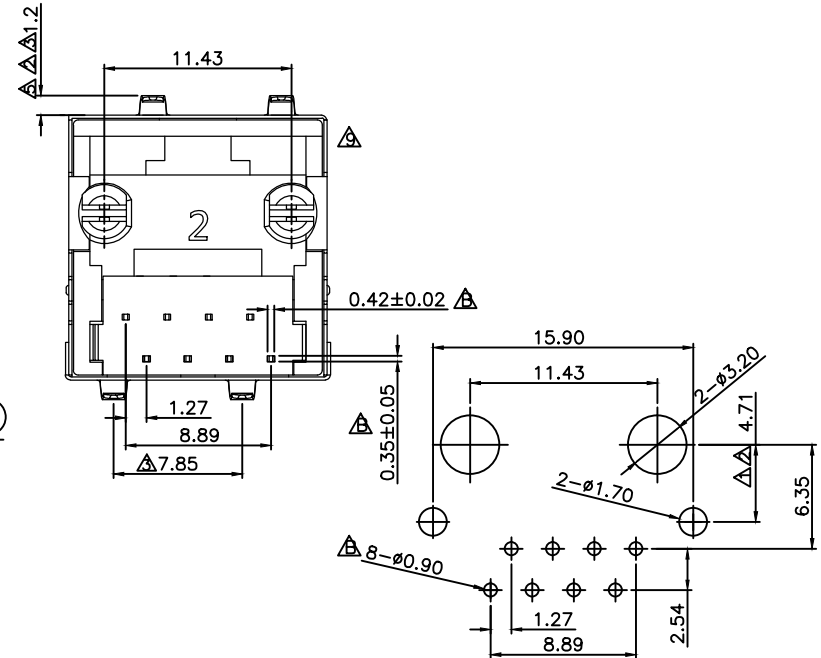
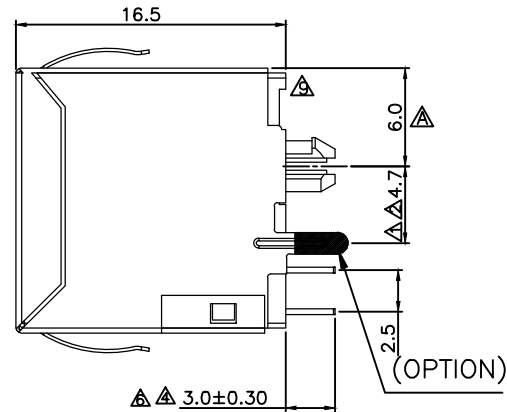
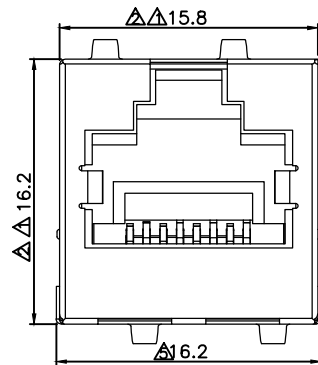


RoHS

THIS IS A RoHS
COMPLIANT
COMPONENT/
PRODUCT.

PC BOARD COMPONENT SIDE SHOWN

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER OR HIGH TEMP. UL94V-0.
STANDARD COLOR: BLACK
1. INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0.
STANDARD COLOR: BLACK
2. CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35 mm.
3. SHIELD : BRASS C2680 H, PLATED 30u"~50u" NICKEL.
t=0.20 mm.
4. PLATING : GOLD PLATING OVER NICKEL.
5. OPERATING LIFE : 750 CYCLES MIN.
6. PCB RETENTION PRE-SOLDER : 1 LB MIN.
7. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO +85°C.
 2. OPERATION : -40°C TO +85°C.
- MATES WITH MODULAR PLUG CONFORMING TO TIA-1096-A.

ORDERING INFORMATION:

PART NUMBER	PRODUCT CODE	CONFIGURATION
3257-0009-02	RJJS-88-14I-E7V-058	30U" GOLD PLATING, WITHOUT EMI TABS
3257-0009-03	RJJS-88-143-E7V-058	30U" GOLD PLATING, WITH EMI TABS
	RJJS-88-1410-E7V-058	30U" GOLD PLATING, WITHOUT EMI TABS, TIN PLATING

UL US UL RECOGNIZED - FILE #E465899

△ X3		DRAWING MODIFY	ANDY	080922
△ X1		DRAWING MODIFY	ANDY	080322
△ X2		修改图面与实物一致	SOULE	120919
△ X2		ADD NEW P/N	HENRY	051419
△ X2		ADD NEW P/N	TYLER	050619
△ X1		3.0 WAS 3.75	HENRY	052418
△ X2		DRAWING MODIFY	MORGAN	090715
△ X1		DRAWING MODIFY	MORGAN	072515
△ X5		ADD NEW P/N	MORGAN	072515
△ X6		ADD NEW P/N	MORGAN	072415
△ X4		ADD NEW P/N	MORGAN	072215
△ X0	0069000	NEW DESIGN	MORGAN	062415
MARK	ECN-NO.	REVISION RECORD	DRAWN	DATE

	UNLESS OTHERWISE SPECIFIED TOLERANCE		SCALE 4:1	CHECKED	
	Dimension Range	Tolerance		APPROVED	
	X.X	±0.20	UNIT	mm	
	X.XX	±0.15	SIZE	A3	
Material/Plated/Notes		NAME		SHEET 1/1	
SEE NOTE		CAT.6A DEDICATED TOP ENTRY PCB JACK		REV. B	
Tooling No.		PART NO. SEE NOTE		DOC. NO.	

Design drawing