

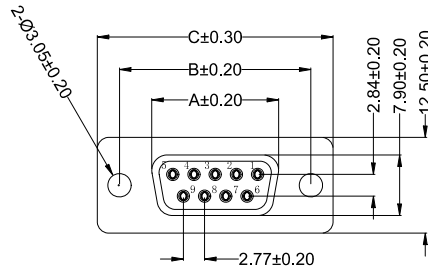







Revised History			
Date	Revised Specification	Ver.	ECN No.
2026-6-29	First Issue.	01	

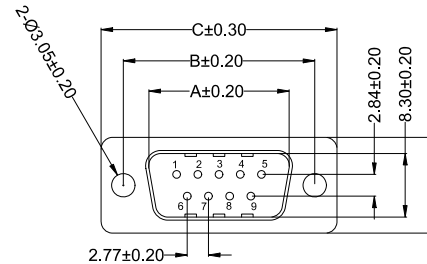

Female Connector



Male Connector



Female Connector

POS	A	B	C	D
9	16.35	25.00	30.80	19.20
15	24.70	33.30	39.20	27.70
25	38.40	47.04	53.05	41.10
37	54.80	63.50	69.40	57.30

Male Connector

POS	A	B	C	D
9	16.92	25.00	30.80	19.20
15	25.25	33.30	39.20	27.70
25	38.96	47.04	53.05	41.10
37	55.42	63.50	69.40	57.30

List:

Part Number	Description	Name
2101-0190-01	CRIMP B. PLUG, BLACK INSULATOR	DBC09-SP
2101-0190-02	CRIMP B. PLUG, BLACK INSULATOR	DBC15-SP
2101-0190-03	CRIMP B. PLUG, BLACK INSULATOR	DBC25-SP
2101-0190-04	CRIMP B. PLUG, BLACK INSULATOR	DBC37-SP
2101-0190-11	CRIMP B. SOCKET, BLACK INSULATOR	DBC09-SS
2101-0190-12	CRIMP B. SOCKET, BLACK INSULATOR	DBC15-SS
2101-0190-13	CRIMP B. SOCKET, BLACK INSULATOR	DBC25-SS
2101-0190-14	CRIMP B. SOCKET, BLACK INSULATOR	DBC37-SS

NOTES:
INSULATION RESISTANCE(MIN.):500MOHMS.
CURRENT RATING(MIN.): 3amp AC.5amp DC.
WITHSTANDING VOLTAGE(MIN):500VAC.
CONTACT RESISTANCE (MAX.)30m ohms.
OPERATING TEMPERATURE:-55°~+105°.

MATERIAL:
INSULATION:PBT+30%GLASS FIBER UL94V-0.
SHELL:SPCC.t=0.4mm.
FRONT COVER:PLATING Ni.
BACK SHELL:PLATING Sn.

encitech

Description	See List		Customer Na.	/	Page	1/1
Part No.	See List	Unit	mm	General Tolerance	NA	
Drawing No.	CSS-DWG-2606031	Ver.	01	Customer ver.	/	Scale N/A
Approved		Checked		Drawing	Sinyu	

File Path: